

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH ISO 14025:2006 & EN 15804:2012 + A2:2019 / AC:2021

Cement-based adhesives by NORDIA S.A.

EPD of multiple products based on the average results of the product group.
This EPD covers more than 10 products.
A detailed list of products can be found between pages 6 and 9.



EPD Registration Number
S - P - 09964

Publication Date
2024 - 02 - 08

Date of Validity
2029 - 02 - 07

Program
The International EPD[®] System
www.environdec.com

Program Operator
EPD International AB

UN CPC
375: Articles of concrete,
cement and plaster

PROGRAM INFORMATION

PROGRAM OPERATOR: EPD International AB



ADDRESS: Box 210 60, SE-100 31 Stockholm, Sweden

WEBSITE: www.environdec.com

E-MAIL ADDRESS: info@environdec.com

EPD OWNER: Nordia S.A



FACILITY – PRODUCTION SITE & HEADQUARTERS: 1km of provincial road Markopoulos - Oropos, Polydendri, 190 11 , Greece

TELEPHONE: +30 (0) 22950 22225

WEBSITE: www.marmoline.gr

EMAIL ADDRESS: info@nordia.gr

- The EPD owner has the sole ownership, liability, and responsibility for the EPD.



PRODUCT CATEGORY RULES (PCR)

- CEN Standard EN 15804 serves as the Core Product Category Rules (PCR)
- PCR 2019:14 Construction products version 1.3.1 (EN 15804:A2)

PCR REVIEW WAS CONDUCTED BY

The technical Committee of the International EPD ® System. See www.environdec.com/TC for a list of members.

Chair: No Chair Appointed

Contact via: info@environdec.com

LCA ACCOUNTABILITY

SustChem Technical Consulting S.A. www.sustchem.gr



INDEPENDENT THIRD-PARTY VERIFICATION OF THE DECLARATION AND DATA, ACCORDING TO ISO 14025:2006, VIA

- ✓ EPD verification by accredited certification body

THIRD PARTY VERIFICATION

Business Quality Verification P.C. is an approved certification body accountable for the third-party verification

www.bqv.gr – info@bqv.gr



THE CERTIFICATION BODY IS ACCREDITED BY

Hellenic Accreditation System ESYD with accreditation number 1218

PROCEDURE FOR FOLLOW-UP OF DATA DURING EPD VALIDITY INVOLVES THIRD PARTY VERIFIER

YES

✓ NO

EPDs within the same product category but registered in different EPD programs, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

NORDIA

COMPANY INFORMATION

VISION

NORDIA S.A. is a prominent company with extensive expertise in the building materials industry, actively engaged in the following sectors:

- Production and construction of construction chemicals and mortars under the MARMOLINE brand.
- Production of concrete admixtures as an authorized licensee of the French multinational CHRYSO.
- Quarrying, processing, and sales of marble under the NORDIA MARBLE brand.

The company's objective is to cater to the construction sector's diverse needs, ranging from home renovations to large-scale new developments. Its foundation lays back in 1998 by establishing a manufacturing plant for construction mortars in Dionyssos, Attica. Dionyssos marble dust, a unique raw material featured in most of their products even today, played a significant role in the development of a product line focused on ready-to-use mortars, with particular emphasis on ready-to-use renders and tile adhesives.

Environmental Commitment

Each product is designed and produced according to the following principles:

- Raw material saving and recycling.
- Energy saving.
- Zero environmental pollution.
- Clean and tidy building site.

EMBLEMATIC CONSTRUCTIONS

Stavros
Niarchos
Foundation
Cultural Center

Basil & Elise
Goulandris
Foundation

Tae Kwo
Do Arena

Megaron the
Athens
Concert Hall

The New
Acropolis
Museum

Athens
Conservatoire

Ayia Sofia
Arena
Stadium -
AEK

Olympic
Velodrom

Grand Resort
Lagonissi



VALUES

The company's dedication is to create top-notch, user-friendly materials while maintaining a strong commitment to environmental responsibility. It adheres to the ISO 14001 standard for Environmental Management Systems, implement innovative and secure production processes, and employ state-of-the-art production facilities with ISO 9001-certified Quality Management. These measures ensure the production of high-quality products that conform to European Commission standards and meet the specific requirements of the countries where the products are distributed.

Its primary focus is on delivering safe, user-friendly, and environmentally responsible products for both residential and commercial developments. The company's team stands out for their exceptional scientific knowledge and professional expertise. Its main objective is to continually seek new knowledge to stay at the forefront of technological advancements. Concurrently, it prioritizes the development of its workforce's skills and foster a culture of teamwork and respect.

PRODUCT INFORMATION



This Environmental Product Declaration (EPD) primarily aims to convey the environmental impacts linked to the manufacturing of **Cement-based Adhesives** offered by **Nordia S.A.**

A CONCISE OVERVIEW AND DESCRIPTION OF NORDIA’S CEMENT-BASED ADHESIVES

The examined products are high-performance, flexible adhesives, available for multiple application purposes, such as bonding of absorbent and non-absorbent tiles, joint-filling of firebricks, fixing marble and lass surfaces, as well as decorative and natural stone surfaces. All products consist mainly of high-strength Portland Cement (I-52.5N), granulometric graded aggregates, various chemical additives, and polymer components, which impart products with impeccable mechanical strength.

High-quality materials and production process, guarantee a high-strength product that will prevent cracking, has excellent adhesion, is easy during its installation process, is moisture- and frost-proof and can used both indoors and outdoors.

All products are classified in terms of their Reaction to Fire (RtF) and are CE certified according to EN specific standards.

TECHNICAL SPECIFICATIONS													
DESCRIPTION	ACRYLIC	UNIVERSAL	KL101	KGL120	KM100	EASY SET	FLEX 2000	FLEX 3000	RIVA ACRYLIC	RIVA SUPER	RIVA SUPER FLEX	SUPER 100	PYRO PRO
Form	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder	Cement - based powder
Color	White	White	White	White	White	White	White	White	White	White	White	White	Grey
Packaging	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags	Paper bags (25kg)	Paper bags	Plastic Bags
	(25kg)	(25kg)	(25kg)	(25kg)			(25kg)	(25kg)				(25kg)	
	Pallets	Pallets	Pallets	Pallets	(25kg)	(25kg)	Pallets	Pallets	(25kg)	(25kg)		Pallets	(7kg)
	Plastic Bags	Plastic Bags	Plastic Bags	Plastic Bags	Pallets	Pallets	Plastic Bags	Plastic Bags	(25kg)	(25kg)	Pallets	Plastic Bags	Cartonboxes
	(5kg)	(5kg)	(5kg)	(5kg)			(5kg)	(5kg)	Pallets	Pallets		(5kg)	
	Cartonboxes	Cartonboxes	Cartonboxes	Cartonboxes			Cartonboxes	Cartonboxes				Cartonboxes	
Water Demand	7kg	7kg	7kg	7kg	7kg	7kg	7kg	7kg	7kg	7kg	7kg	7kg	1.4kg
Application Temperature	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C	from +5 °C to +35 °C
Open Time	20min	30min	20min	20min	30min	30-40min	30-40min	30-40min	20min	30min	30min	30-40min	60-120min
Minor Adjustments Open Time	10min	10min	5min	10min	10min	10min	10min	10min	10min	10min	10min	10min	-

PRODUCT INFORMATION



TECHNICAL SPECIFICATIONS														
DESCRIPTION	CONTROL NORM	ACRYLIC	UNIVERSAL	KL101	KGL120	KM100	EASY SET	FLEX 2000	FLEX 3000	RIVA ACRYLIC	RIVA SUPER	RIVA SUPER FLEX	SUPER 100	PYRO PRO
ADHESION STRENGTH AFTER:														
28 Days	EN 12004:2007+A1 and Table 5 EN 1348	> 0.5N/mm²	> 0.5N/mm²	> 0.5N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.5N/mm²
Heating at +70 °C	EN 12004:2007+A1 and Table 5 E	> 0.5N/mm²	> 0.5N/mm²	> 0.5N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	-
Immersion In Water	EN 12004:2007+A1 and Table 5 E	> 0.5N/mm²	> 0.5N/mm²	> 0.5N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	-
25 Freeze -Thaw Cycles	EN 12004:2007+A1 and Table 5 E	> 0.5N/mm²	> 0.5N/mm²	> 0.5N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	> 1.0N/mm²	-
Reaction To Fire	EN 12004:2007+A1 § 4.4 EN 13501-1 EN 998-2:2016 § 5.4.8	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1	Class A1

PRODUCT INFORMATION



ACRYLIC is a white adhesive based on high strength Portland white cement (I-52.5) and excellent raw materials. It is used for bonding all types of tiles with absorbency, on standard floor or wall substrates, indoors. Provides high initial and final bonding strengths, without sliding on the wall.

- High bonding strength • No slipping of the tiles during installation on the wall • Resistance to temperature fluctuations and humidity • Very good workability.

UNIVERSAL is a white cement-based tile adhesive.

It has zero vertical slip, provides high initial and final bond strength and moisture resistance. Suitable for bonding ceramic tiles, wall or floor tiles, to concrete, concrete, adhesive etc. surfaces.

- High strength • Strong adhesion • Resistant to temperature fluctuations • Resistant to humidity and frost • Unrivalled quality of raw materials • Easy application • Excellent workability • Zero vertical slip • Indoor use.



KL101 is a polymer modified adhesive mortar for autoclaved aerated concrete masonry.

Suitable for fixing aerated concrete elements in both external and internal masonry. Used as an adhesive for the construction of structural elements made of aerated concrete blocks as well as other similar elements in both external and internal masonry. Additionally, it can be used to fix other building materials such as decorative bricks, etc.

- High strength • Strong adhesion • Resistant to temperature fluctuations • Resistant to humidity and frost • Unrivalled quality of raw materials • Easy application • Excellent workability • Indoor and outdoor use.

KGL120 is a ready - made white reinforced cementitious coarse - grained adhesive - joint for glass blocks based on Portland white cement of high strength, graded aggregates and special polymer resins to improve the adhesion of glass blocks. Ideal for large 1 - 2 cm thick joints in glass blocks and decorative bricks. Frost-resistant.

- High strength • Excellent adhesion • No leaking • Fast drying • Moisture and frost resistance • Unrivalled quality of raw materials • Easy application with the addition of water only • Indoor and outdoor use.

PRODUCT INFORMATION



FLEX2000 is high performance cementitious tile adhesive with zero vertical slip and extended open time. Suitable for bonding tiles of all types and sizes (gres porcellanitic, granite, marble, glass, mosaic, decorative stones, natural stone, large-size tiles) to horizontal and vertical surfaces. It is particularly recommended for demanding tile bonding on surfaces with high adhesion, flexibility and tightness requirements (e.g. balconies, roofs, underfloor heating, concrete, tanks, swimming pools, adhesive boards, etc.). Suitable for indoor and outdoor use.

KM100 is a white cementitious adhesive, based on high - strength Portland white cement (I - 52.5), reinforced with polymer resins, white marble aggregates and special additives to improve adhesion of marble or granite tiles.

- Excellent adhesion • High strength • Moisture and frost - proof • Easy to apply - simply add water • Indoor and outdoor use • Protects the white and light-colored marbles from stains, cracks and flaking, in case of moisture coming from the substrate.



EASY SET is a high-quality, cement-based, white tile adhesive, modified with aggregates and special additives for zero vertical slip and extended open time.

Recommended for substrates where strong bonding of all types of tiles, with reduced or zero absorbency, horizontal or vertical surfaces is required. For indoor and outdoor use.

Excellent adhesion even on demanding substrates

- Zero vertical slip of the tiles during installation • Prolonged open time • High resistance to temperature fluctuations (heat-cold) and humidity • Easy application • Excellent workability. It is also suitable for laying the following types of tiles:

- Absorbent and non - absorbent tiles, small to medium sized
- Artificial and natural decorative stones
- Artificial and natural granite tiles
- Artificial and natural stone tiles
- Gres porcelanato tiles
- Glass-figures-Marble and mosaics

PRODUCT INFORMATION



FLEX3000 is a high performance, polymer modified, ultra-flexible, cementitious tile adhesive with zero vertical slip and extended open application time. Suitable for fixing tiles of any type and size (gres porcelanato type, granite tiles, marble, glass, tiles, decorative stones, natural stone, large dimension tiles) on horizontal and vertical surfaces.

- Highly recommended for demanding tile fixings on surfaces with high adhesion requirements, flexibility, vibration and moisture resistance, (eg balconies, terraces, floors and underfloor heating, concrete, pools, water tanks, gypsum boards, etc.). Suitable for indoor and outdoor areas.



RIVA FIX ACRYLIC SUPER FLEXIBLE is a white, cementitious-based, super-reinforced tile adhesive for all types of tiles, based on Portland high strength white cement (I- 52.5), with polymer resins, selected aggregates and special additives to improve tile adhesion on difficult, non-absorbent surfaces where elastic and strong bonding is required.

- Particularly strong bonds with elastic characteristics
- No slipping of the tiles during installation
- High resistance to temperature fluctuations (heat-cold) and humidity
- Excellent quality of raw materials
- Easy application
- Excellent workability
- Indoor and outdoor use.

PRODUCT INFORMATION




RIVA SUPER is a white adhesive based on Portland high strength white cement (I-52.5), reinforced with polymer resins, excellent raw materials and special additives to improve tile adhesion on difficult, low absorbency surfaces. Suitable for situations where strong bonding is required with zero slip of the tiles on the wall and extended open time of application.

- High strength • High bonding strength on almost any surface
- High elasticity and vibration resistance • No slipping of the tiles during installation • Resistance to moisture and frost • Excellent quality of raw materials
- Ease of application • Excellent workability • Indoor and outdoor use

PYRO PRO is a special mortar based on refractory cement, special aggregates and special additives, for the construction and the proper grouting of firebricks. Extremely high resistance to high temperatures in the hearths of fireplaces, ovens and chimneys. It is used for the building and grouting of firebricks in new fireplaces, stoves, ovens, chimneys, grills indoors and outdoors and for the restoration of worn parts of these.

- Strong adhesion • High resistance to high temperatures • Does not crack • Resistant to temperature changes • Easy to use by adding only water.



SUPER 100 is a high performance, resinous, flexible, cementitious tile adhesive with zero vertical slip and extended open time. Suitable for bonding tiles of all types and sizes (gres porcellanitic, granite, marble, glass, mosaic, decorative stones, natural stone, large format tiles) to horizontal and vertical surfaces. It is particularly recommended for demanding tile bonding on surfaces with high requirements regarding adhesion, flexibility and moisture resistance (e.g. balconies, terraces, floors with underfloor heating, concrete, adhesive boards, etc.)

CONTENT INFORMATION



This is an EPD of multiple products, based on an average product. **Cement-based Adhesive** has been selected as the average product. The composition of the product is expressed in mass per declared unit (kg/kg). The table below displays the content declaration for this average product.

CONTENT DECLARATION OF AN AVERAGE CEMENT-BASED ADHESIVE EXPRESSED IN KG PER D.U. (KG/KG)				
PRODUCT COMPONENTS	WEIGHT KG/KG	RANGE	POST-CONSUMER RECYCLED MATERIAL (%)	BIOGENIC MATERIAL, WEIGHT- % AND KG C/KG
Portland Cement I 52.5N	3.07E-01	2.80E-01 – 3.10E-01	0%	0
Calcium Carbonate	6.64E-01	5.60E-01 – 7.12E-01	0%	0
Calcium Hydroxide	3.93E-04	0.00E+00 – 2.00E-02	0%	0
Polymer Dispersions	2.11E-02	0.00E+00 – 1.00E-01	0%	0
Additives	3.66E-03	5.00E-04 – 1.00E-02	0%	0
TOTAL	1.00E+00	-	0%	0
PACKAGING MATERIALS	WEIGHT KG/KG	RANGE	WEIGHT (%) VERSUS THE PRODUCT	WEIGHT, BIOGENIC CARBON, KG C/KG
Polyethylene LDPE (film)	3.78E-04	3.34E-04 – 8.33E-03	0.04%	0
Paper (Sacks)	3.77E-03	0.00E+00 – 4.54E-03	0.38%	1.58E-03
Wood (pallets)	1.89E-02	1.67E-02 – 2.54E-02	1.89%	3.57E-04
Polypropylene (Sacks)	1.48E-05	0.00E+00 – 1.20E-02	0.00%	0
TOTAL	2.30E-02	-	2.304%	1.94E-03
CARBON ELECTRICITY INTENSITY				
ENVIRONMENTAL EFFECTS		GREEK MIX* - CO ₂ EMISSIONS (KGCO ₂ /KWH)		
		0.642		

* In accordance with section 1.4 of PCR 2019: 14 "Construction Products" version 1.3.1, it is required to disclose the climate impact (measured in kilograms of CO2 eq. per kilowatt-hour (kWh) using the GWP-GHG indicator) associated with the electricity acquisition during the manufacturing process in A3

➤ No substances included in the Candidate List of Substances of Very High Concern for authorization under the REACH Regulations that exceed 0.1% of the total weight are present in the examined systems.

LCA INFORMATION



SYSTEM BOUNDARIES

This LCA study follows a “cradle-to-gate” approach with modules C1-C4 & module D.

DECLARED UNIT

The declared unit used in this EPD is **one (1) kilogram (kg) an average cement-based adhesive.**

TIME REPRESENTATIVENESS

The data used for the analysis are based on one-year average production data, from August 2022 to July 2023.

GEOGRAPHICAL SCOPE

Global

DATABASES USED

Ecoinvent 3.8.1 & Professional 2021

SOFTWARE USED

LCA for experts (GaBi)

MODULE	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE			USE STAGE						END OF LIFE STAGE				RESOURCE RECOVERY STAGE
	Raw Material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse – Recovery- Recycling potential
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
MODULES DECLARED	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
GEOGRAPHY	GLO	GLO	GR	-	-	-	-	-	-	-	-	-	EU-27	EU-27	EU-27	EU-27	EU-27
SHARE OF SPECIFIC DATA	>90%																
VARIATION – PRODUCTS	Variation – products From -14.03% to 51.45%																
VARIATION -SITES	0%																


*The variations above correspond to the differences in GWP-GHG indicator results in A1-A3 between an average cement-based adhesive product and the KL101 and the FLEX3000, that correspond to the minimum and maximum results of the specific indicator, among the products under study.

DESCRIPTION OF EXAMINED MODULES



As depicted in the preceding diagram, the study encompasses specific Life Cycle stages: **Production**, **End-of-life**, and **Resource - Recovery**. Information modules that have been excluded (construction and use stages) are scenario-driven. The main aim of this Environmental Product Declaration (EPD) is to communicate the environmental factors associated with the real data that the company can manage during the production of cement-based Adhesives.

THE PRIMARY PROCESSES INVOLVED IN THE PRODUCTION PROCESS ARE REPRESENTED IN THE BELOW FLOW-CHART:

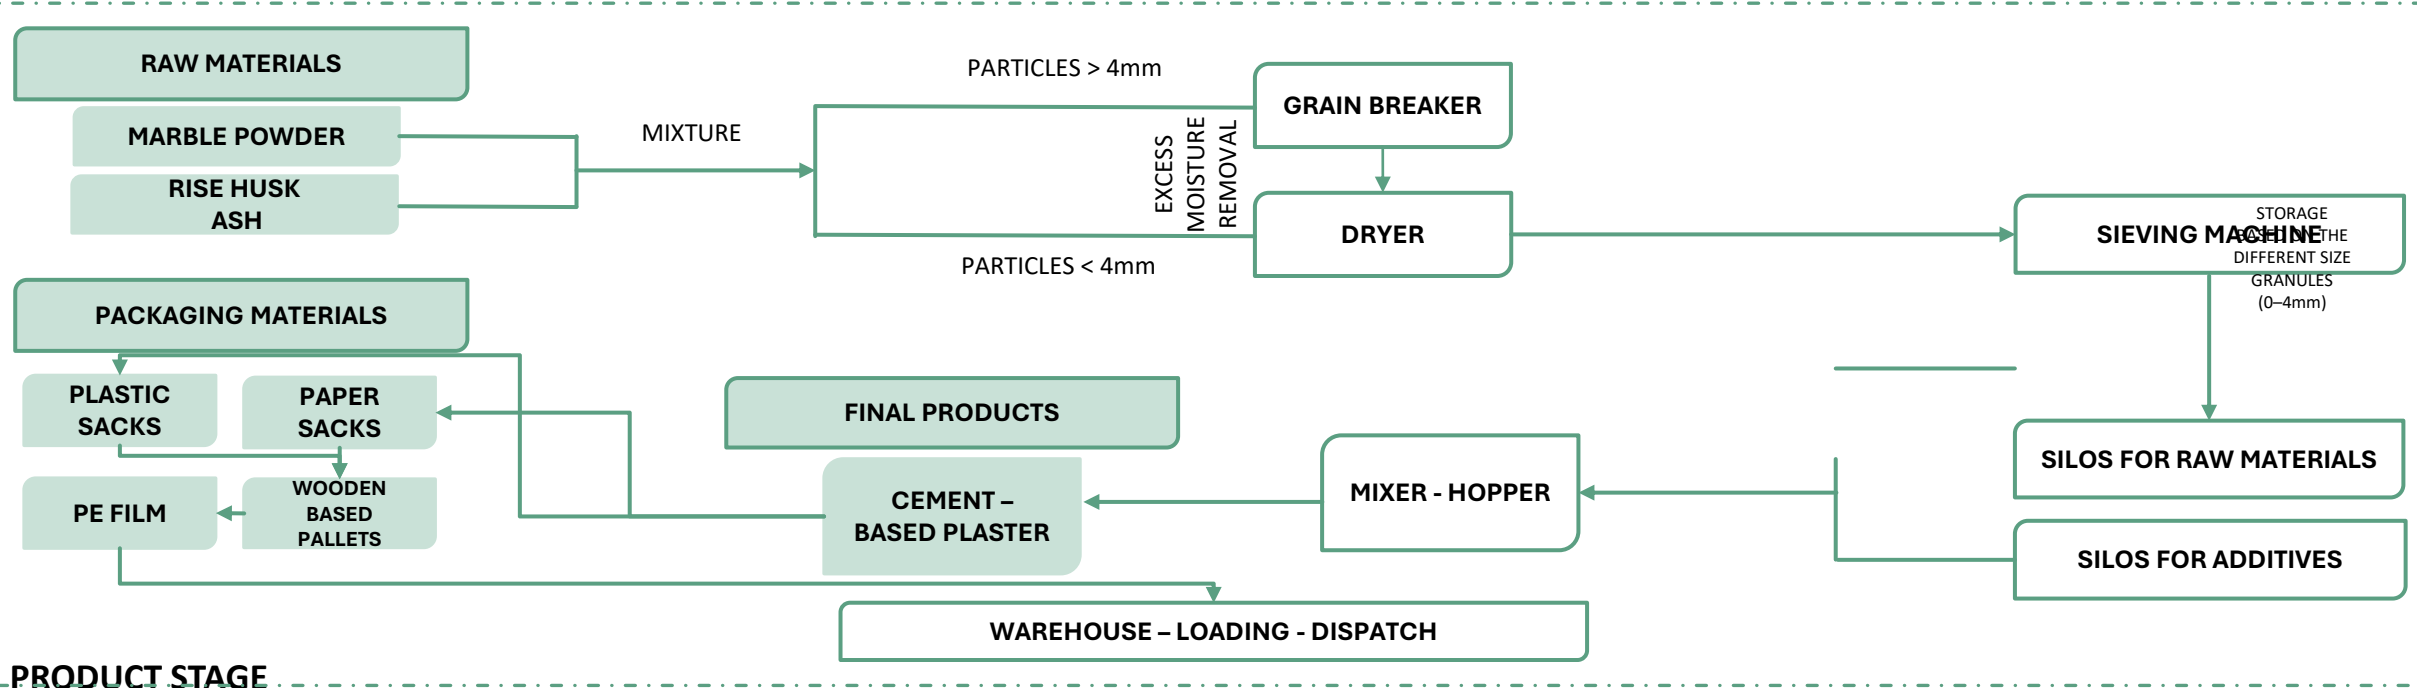

PRODUCT STAGE

MODULES A1-A3

These aggregated modules (Modules A1-A3), comprehensively assess the entire lifecycle of raw materials and packaging components, encompassing their creation, transportation to Nordia's facilities, and the utilization of associated utilities such as electricity. To be more specific, Module A1 focuses on the manufacture of raw and packaging materials utilized in the production of cement-based Adhesives, including items like Portland Cement I 52.5N, calcium carbonate, calcium hydroxide, copolymer vinyl acetate and ethylene, as well as paper and plastic sacks, wooden-based pallets, and PE film for wrapping. Module A2 pertains to the transportation of these raw and packaging materials to Nordia's manufacturing plant. Lastly, Module A3 deals with the generation of imported electricity from the Greek grid and the utilization of propane for eliminating excess moisture.

DESCRIPTION OF EXAMINED MODULES



END-OF-LIFE STAGE

The end-of-life phase for the construction product initiates when it's either replaced, dismantled, or removed from the building or construction site, no longer serving any purpose. Alternatively, it can commence when the building itself reaches its end-of-life, depending on the chosen scenario for how the product's life ends. In this study, we take the perspective that the end-of-life stage for cement-based adhesives begins when the building is deconstructed or demolished, as these adhesives cannot be separated from the building's structure once installed.

In terms of the different end-of-life scenarios, we examine the emissions associated with disposing of 100% of cement-based adhesive waste during this phase. We opt for the most probable approach, which, in this case, is landfilling. Due to uncertainties regarding the specific disposal methods used, we've taken a practical approach and considered landfilling as the sole disposal option.

PROCESSES	KG/KG
Collection process specified by type	0kg collected separately
	1kg collected with mixed construction waste
Recovery system specified by type	0kg for re-use
Disposal specified by type	0kg for recycling
Assumptions for scenario development (transportation)	0kg for energy recovery

MODULE C1

Module C1 focuses on calculating emissions associated with removing the product from the building during the deconstruction process. In this study, we have established a realistic scenario derived from literature research. The deconstruction of cement-based Adhesives is assumed to be carried out using mechanical means, specifically employing a 100kW diesel excavator.

MODULE C2

Within this module, we examine the transport of disassembled cement-based Adhesives to waste treatment facilities. We make certain assumptions regarding the average distance between construction sites and waste management facilities, as well as the modes of transportation involved.

MODULE C3

In this module, it is assumed the 100% of the cement adhesive waste will be landfilled and hence the environmental impact is considered equal to zero.

MODULE C4

This module takes into account the emissions linked to the disposal of all waste generated from cement-based adhesive. The most realist and plausible method, was adopted which in this instance, is landfilling.

Disclaimer: Considering that Module C is included in this EPD, is discouraged to use the results of modules A1-A3 without considering the results of module C.

RESOURCE/ RECOVERY STAGE


MODULE D

As outlined in the PCR for "Construction products," this module evaluates the environmental consequences of net flows involving reclaimed materials (those that are reused or recycled) or the energy output exiting modules A-C. Given that all deconstructed waste will be sent to a landfill without any recovery, reuse, or recycling processes, this module is considered to have zero impact.

SYSTEM DIAGRAM



PRODUCT STAGE MODULES A1 – A3

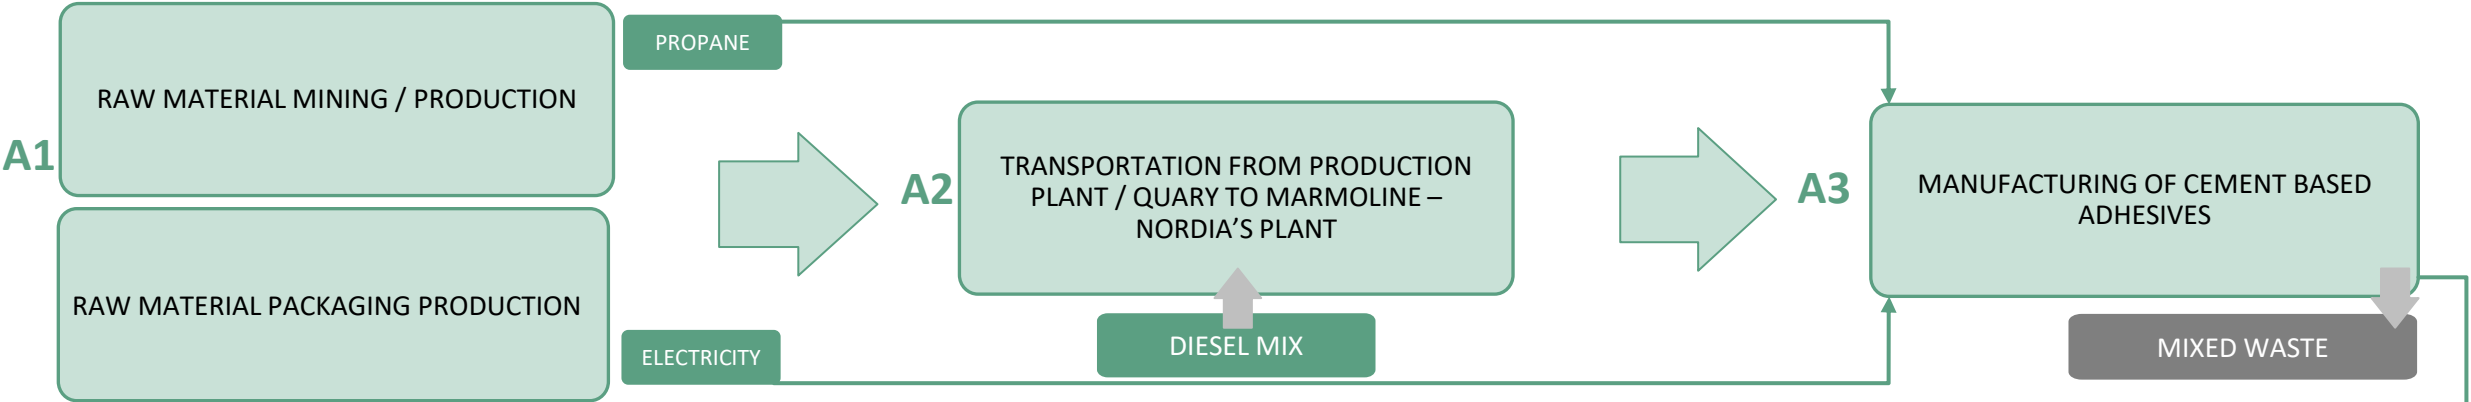

END-OF-LIFE STAGE MODULES C1, C2, C4



ADDITIONAL LCA INFORMATION



ASSUMPTIONS:

- Assumptions were employed when selecting the modes of transportation for road routes, taking into account factors such as technology, fuel type, and payload capacity. An average mode of transportation was chosen for each route to offer a reasonable approximation for all transported goods. It is assumed that a diesel-powered truck with Euro 6 emissions standards, a gross weight of 12-14 tons, and a payload capacity of 9.3 tons is used.
- An assumption was made regarding the timing and method used for disassembling cement-based Adhesives. The end-of-life phase for these Adhesives is set to align with the building's demolition. To achieve this, a deconstruction was carried out, using mechanical methods, specifically using a diesel-powered excavator with a 100kW power rating.
- Assumptions regarding the end-of-life of deconstructed cement-based adhesive waste is used. More specifically, the most likely outcome is that all the broken-down waste will be sent to a landfill for disposal. This choice is supported by the fact that over 40% of waste made from cement in Greece is disposed of in this manner. Moreover, cement-based Adhesives do not break down naturally or decompose, making them inappropriate for composting or other organic waste management methods. They are chemically stable, which reduces the risk of harmful substances seeping into the environment when they are securely stored in a landfill.
- Regarding the disposal of cement-based adhesives in landfills, a process referred to as "Treatment of limestone residue, inert material landfill" has been utilized. This approach is chosen due to the substantial presence of calcium carbonate in a significant portion of this waste category. Consequently, this specific database is deemed a fitting and precise portrayal of the waste material.
- An assumption regarding the proximity of waste treatment facilities to construction sites was made. Namely, it was assumed that the treatment facilities would be located within a distance of 100 kilometers from the construction sites.
- When annual production volumes were unavailable for the reference year, leading to the absence of packaging material consumption rates, a business-as-usual model was adopted to evaluate the potential environmental impacts of products, particularly exemplified by KGL120, for which specific data were not accessible.
- Although drying and grain cracking processes do not take place on a regular basis in the production process, the LCA study takes them into account so as to assess the worst-case scenario.

ALLOCATIONS:

- Regarding electricity consumption, 80% of the total volumes used, is attributed to the production of mortars.
- All propane consumption, constituting 100%, is exclusively allocated to mortar production, encompassing adhesives, floor screeds, plasters, grouts, and concrete repair products.
- The mass allocation method was utilized to assess manufacturing process waste, chosen for its reference to total facility waste volumes in the specified year.

CUT-OFFS:

The combined disregarded input flows for each module, such as A1-A3, C1-C4, and module D, should not exceed 5% of the total energy usage and mass. These guidelines were adhered to in order to assess the influence of including or excluding inventory flows. All key raw materials, components, and necessary energy inputs are accounted for within the system boundaries. The study incorporates data for basic flows to and from the product system, accounting for at least 99% of the stated environmental impacts. The only processes not considered in this study are:







- Production of certain primary flows, i.e., special chemical additives, which were determined to be considerably less than 1% of the declared environmental impacts, as well as the production of carton box used for packaging purposes, which was determined to be considerably less than 5% of the specified unit mass, and its environmental effects would remain negligible.
- The handling of mixed municipal waste because the quantities generated are so minimal when compared to the declared unit volume, as to be considered inconsequential.
- Wooden-based pallets management is not included in this study since these pallets are intended for multiple uses.
- The study does not account for the manufacturing of silos designed for transportation purposes, as they fall under the classification of capital goods

ENVIRONMENTAL PERFORMANCE INDICATORS

NORDIA S.A. – CEMENT-BASED ADHESIVES



POTENTIAL ENVIRONMENTAL IMPACTS/ 1 KG OF AN AVERAGE CEMENT-BASED ADHESIVE

CORE ENVIRONMENTAL IMPACT INDICATORS		UNIT	A1-A3 	C1 	C2 	C3 	C4 	D 
Global Warming Potential – total	GWP-total	kg CO ₂ eq.	3.436E-01	6.460E-04	1.218E-02	0.000E+00	1.246E-02	0.000E+00
Global Warming Potential – fossil	GWP-fossil	kg CO ₂ eq.	3.433E-01	6.410E-04	1.208E-02	0.000E+00	1.243E-02	0.000E+00
Global Warming Potential – biogenic ^[3]	GWP-biogenic	kg CO ₂ eq.	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Global Warming Potential – land use and land use change	GWP-luluc	kg CO ₂ eq.	2.631E-04	5.057E-06	9.908E-05	0.000E+00	2.625E-05	0.000E+00
Global Warming Potential – GHG ^[1]	GWP-GHG	kg CO ₂ eq.	3.436E-01	6.460E-04	1.218E-02	0.000E+00	1.246E-02	0.000E+00
Ozone Depletion Potential	ODP	kg CFC 11 eq.	7.705E-09	7.889E-20	1.546E-18	0.000E+00	3.597E-09	0.000E+00
Acidification Potential	AP	Mole of H ⁺ eq.	7.524E-04	3.044E-06	1.174E-05	0.000E+00	1.108E-04	0.000E+00
Eutrophication Potential – freshwater	EP-freshwater	kg P eq.	1.900E-05	1.833E-09	3.592E-08	0.000E+00	9.337E-07	0.000E+00
Eutrophication Potential – marine	EP-marine	kg N eq.	8.025E-05	1.431E-06	3.691E-06	0.000E+00	4.286E-05	0.000E+00
Eutrophication Potential – terrestrial	EP-terrestrial	mol N eq.	2.436E-03	1.585E-05	4.454E-05	0.000E+00	4.679E-04	0.000E+00
Photochemical Oxidant Formation Potential	POCP	kg NMVOC eq.	6.963E-04	4.026E-06	1.014E-05	0.000E+00	1.324E-04	0.000E+00
Abiotic Depletion Potential – elements ^[2]	ADPe	kg Sb eq.	5.306E-07	4.701E-11	9.211E-10	0.000E+00	2.533E-08	0.000E+00
Abiotic Depletion Potential. fossil resources ^[2]	ADPf	MJ net calorific value	3.330E+00	8.220E-03	1.611E-01	0.000E+00	2.498E-01	0.000E+00
Water Deprivation Potential ^[2]	WDP	m ³ world eq. deprived	6.370E-02	5.362E-06	1.051E-04	0.000E+00	7.222E-03	0.000E+00

[1] This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero







[2] The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

[3] Actually, this indicator is negative due to an uptake of biogenic carbon in packaging materials. Considering that module A5 is not declared, the correlated emissions due to end-of-life of packaging, are balanced-out already in Module A1-A3, hence resulting in a total value of zero.

ENVIRONMENTAL PERFORMANCE INDICATORS

NORDIA S.A. – CEMENT-BASED ADHESIVES









POTENTIAL ENVIRONMENTAL IMPACTS/ 1 KG OF AN AVERAGE CEMENT-BASED ADHESIVE								
RESOURCE USE INDICATORS		UNIT	A1-A3 	C1 	C2 	C3 	C4 	D 
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	PERE	MJ. net calorific value	1.147E+00	4.587E-04	8.988E-03	0.000E+00	2.724E-03	0.000E+00
Use of renewable primary energy resources used as raw materials	PERM	MJ. net calorific value	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Total use of renewable primary energy resources	PERT	MJ. net calorific value	1.147E+00	4.587E-04	8.988E-03	0.000E+00	2.724E-03	0.000E+00
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	PENRE	MJ. net calorific value	3.328E+00	8.231E-03	1.613E-01	0.000E+00	2.499E-01	0.000E+00
Use of non-renewable primary energy resources used as raw materials	PENRM	MJ. net calorific value	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Total use of non-renewable primary energy resources	PENRT	MJ. net calorific value	3.331E+00	8.231E-03	1.613E-01	0.000E+00	2.500E-01	0.000E+00
Use of secondary material	SM	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Use of renewable secondary fuels	RSF	MJ. net calorific value	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Use of non-renewable secondary fuels	NRSF	MJ. net calorific value	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Use of net fresh water	FW	m³	1.459E-03	5.251E-07	1.029E-05	0.000E+00	1.682E-04	0.000E+00

ENVIRONMENTAL PERFORMANCE INDICATORS

NORDIA S.A. – CEMENT-BASED ADHESIVES



POTENTIAL ENVIRONMENTAL IMPACTS/ 1 KG OF AN AVERAGE CEMENT-BASED ADHESIVE

WASTE INDICATORS		UNIT	A1-A3	C1	C2	C3	C4	D
								
Hazardous waste disposed	HWD	kg	1.715E-10	4.148E-13	8.126E-12	0.000E+00	0.000E+00	0.000E+00
Non-hazardous waste disposed	NHWD	kg	2.064E-04	1.223E-06	2.396E-05	0.000E+00	0.000E+00	0.000E+00
Radioactive waste disposed	RWD	kg	5.911E-06	9.956E-09	1.951E-07	0.000E+00	0.000E+00	0.000E+00
OUTPUT FLOWS		UNIT						
Components for re-use	CRU	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Material for recycling	MFR	kg	1.260E-03	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Materials for energy recovery	MER	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Exported energy	EE	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS		UNIT						
Particulate matter emissions	PM	Disease incidence	1.263E-08	3.446E-11	7.031E-11	0.000E+00	6.333E-09	0.000E+00
Ionizing radiation human ^[4]	IRP	kBq U235 eq.	2.173E+00	1.425E-06	2.793E-05	0.000E+00	1.127E-03	0.000E+00
Eco-toxicity. Freshwater ^[2]	ETP-fw	CTUe	8.586E-01	5.941E-03	1.164E-01	0.000E+00	1.705E-01	0.000E+00
Human toxicity. Cancer effects ^[2]	HTP-c	CTUh	5.110E-10	1.198E-13	2.349E-12	0.000E+00	5.390E-12	0.000E+00
Human toxicity. Non-cancer effects ^[2]	HTP-nc	CTUh	1.636E-08	7.209E-12	1.215E-10	0.000E+00	1.239E-10	0.000E+00
Land use related impacts/Soil quality ^[2]	SQP	dimensionless	3.411E+00	2.823E-03	5.531E-02	0.000E+00	3.557E-01	0.000E+00


A complete list of the potential environmental impacts is available for the all cement-based Adhesives and can be directly acquired from Nordia's personnel.

[2] The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

[4] This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

INTERPRETATION


- The following diagram illustrates the respective contributions of the assessed modules (A1-A3 & C1-C4) to the fundamental environmental impact indicators. The evaluation of the outcomes took the form of a dominance analysis focused on these key environmental impacts. Evidently, the modules A1-A3 exert a predominant influence on the majority of the scrutinized impact categories
- Concerning the assessment of Global Warming Potential (GWP), it is observed that the most influential phases in the life cycle are modules A1-A3, which collectively contribute to more than 95% of the total impact. These modules encapsulate a significant portion of environmental considerations. Following these, Modules C1, C2, and C4 also play roles in GWP, albeit to a lesser extent, accounting for 0.18%, 3.30%, and 3.38%, respectively. This breakdown illustrates the hierarchy of contributions to GWP throughout the various phases of the product's life cycle.

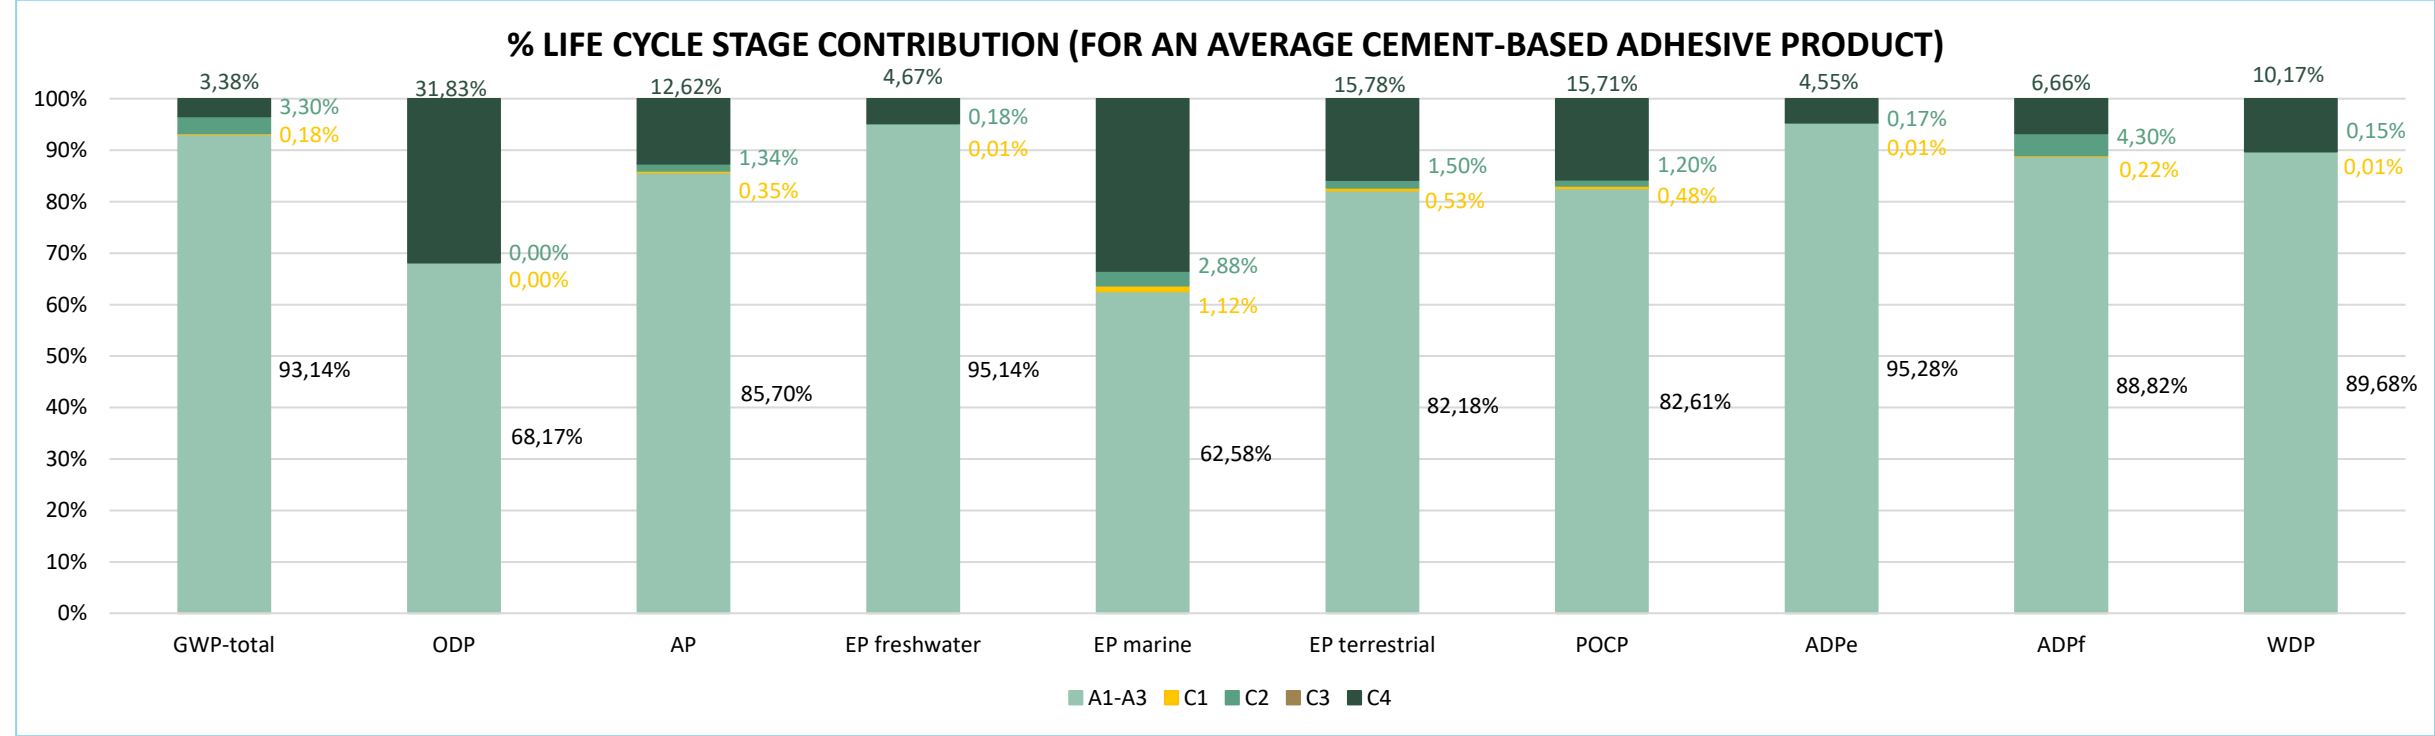

Disclaimer: The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

INTERPRETATION

- The majority of the total Global Warming Potential (GWP) is associated with the extraction and production of raw materials, with a notable focus on the manufacturing of Portland Cement I 52.5N. This significant influence is vividly depicted in the left-side chart of the presentation, where Portland Cement I 52.5N production alone accounts for 68.65% of the entire GWP-total. This emphasizes that the environmental impact, especially in terms of global warming potential, is greatly driven by the processes involved in obtaining and producing raw materials, and the production of Portland Cement I 52.5N plays a central role in this impact. The chart visually underscores the pivotal role of this particular aspect in the overall carbon footprint.

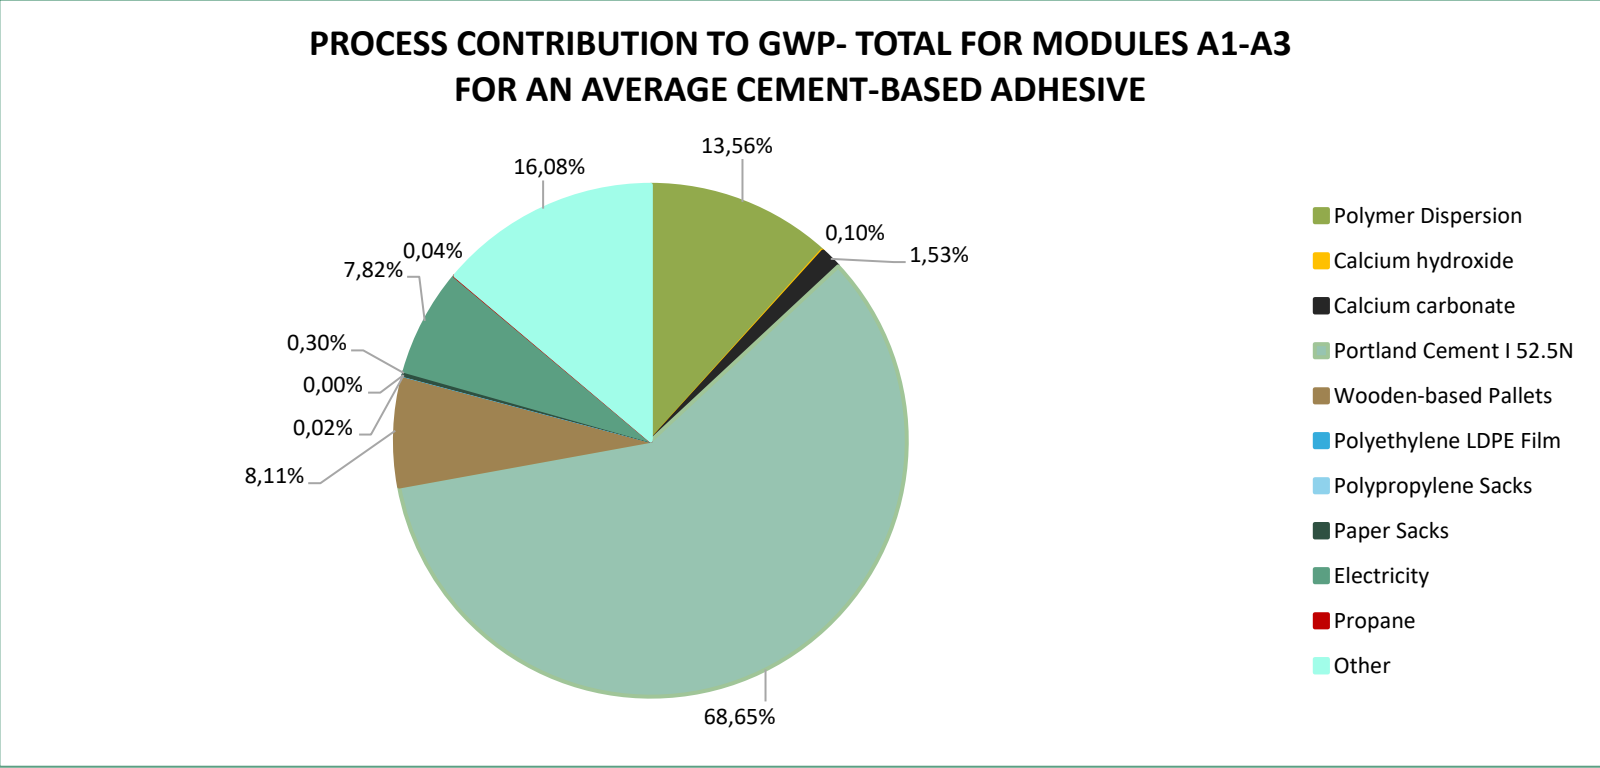

Disclaimer: The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

ADDITIONAL ENVIRONMENTAL INFORMATION



% VARIATIONS OF INCLUDED PRODUCTS

ENVIRONMENTAL IMPACT INDICATORS

As per the PCR 2019:14 Construction Products version 1.3.1, when the products included exhibit a difference of over 10% concerning their declared environmental impact indicators, the specific variance for each impact indicator should be reported. The subsequent tables showcase total variances observed for all examined products, encompassing all the environmental impacts considered, compared to the potential environmental impacts of an average product.

% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE									
INDICATOR	FLEX3000	PYRO PRO	ACRYLIC	UNIVERSAL	KL101	KGL120	KM100	EASY SET	FLEX2000
Climate Change – Total	51.45%	-12.17%	-13.78%	-13.89%	-14.03%	-10.13%	-2.72%	-3.01%	8.41%
Climate Change – Fossil	51.48%	-12.16%	-13.79%	-13.90%	-14.03%	-10.13%	-2.72%	-3.01%	8.42%
Climate Change – Biogenic	NA	NA	NA	NA	NA	NA	NA	NA	NA
Climate Change - Land Use and Land Use Change	20.35%	-24.06%	-5.22%	-6.39%	-7.87%	-9.82%	4.12%	0.28%	2.91%
Global Warming Potential - GWP-GHG	51.45%	-12.17%	-13.78%	-13.89%	-14.03%	-10.13%	-2.72%	-3.01%	8.41%
Ozone Depletion	67.22%	-20.77%	-18.83%	-19.19%	-19.64%	-18.54%	-3.25%	-4.26%	12.11%
Acidification	71.55%	-17.71%	-19.93%	-20.16%	-20.45%	-16.23%	-4.13%	-4.79%	12.71%
Eutrophication, fresh water	132.54%	-56.96%	-36.08%	-37.33%	-38.91%	-38.18%	-4.49%	-8.05%	23.52%
Eutrophication, marine	91.52%	-16.86%	-23.92%	-24.45%	-25.11%	-18.43%	-4.92%	-6.39%	15.56%
Eutrophication, terrestrial	41.96%	-11.61%	-12.10%	-12.32%	-12.59%	-9.44%	-1.84%	-2.45%	7.52%
Photochemical Ozone formation, human health	63.57%	-10.26%	-17.72%	-17.98%	-18.30%	-11.02%	-3.55%	-4.25%	11.18%
Resource use, mineral and metals	263.47%	-72.71%	-70.51%	-70.93%	-71.44%	-72.06%	-18.30%	-19.49%	46.57%
Resource use, fossils	152.21%	-18.31%	-40.53%	-40.74%	-41.00%	-24.78%	-10.99%	-11.59%	26.15%
Water Use	180.12%	-11.73%	-47.92%	-48.35%	-48.87%	-22.93%	-12.79%	-13.86%	30.95%

The variations in impact indicators among products in this EPD, particularly when differences exceed 10%, were found to be linked with the concentration of cement within the respective product formulations. This association underscores the significance of cement content in influencing the observed differences in environmental impacts among the featured products.

ADDITIONAL ENVIRONMENTAL INFORMATION



% VARIATIONS OF INCLUDED PRODUCTS ENVIRONMENTAL IMPACT INDICATORS

% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE				
INDICATOR	RIVA ACRYLIC	RIVA SUPER	RIVA SUPER FLEX	SUPER100
Climate Change – Total	-13.78%	-2.98%	5.59%	5.85%
Climate Change – Fossil	-13.79%	-2.98%	5.59%	5.85%
Climate Change – Biogenic	NA	NA	NA	NA
Climate Change - Land Use and Land Use Change	-5.22%	-1.15%	0.95%	3.78%
Global Warming Potential- GWP-GHG	-13.78%	-2.98%	5.59%	5.85%
Ozone Depletion	-18.83%	-4.77%	7.56%	8.43%
Acidification	-19.93%	-4.93%	8.22%	8.78%
Eutrophication, fresh water	-36.08%	-9.95%	13.89%	16.91%
Eutrophication, marine	-23.93%	-6.84%	9.67%	10.93%
Eutrophication, terrestrial	-12.10%	-2.62%	4.88%	5.40%
Photochemical Ozone Formation, human health	-17.72%	-4.27%	7.32%	7.94%
Resource use, mineral and metals	-70.51%	-20.16%	29.44%	30.44%
Resource use, fossils	-40.53%	-11.00%	17.27%	17.77%
Water Use	-47.92%	-13.20%	20.39%	21.40%

ADDITIONAL ENVIRONMENTAL INFORMATION

% VARIATIONS OF INCLUDED PRODUCTS

USE OF RESOURCES



% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE									
INDICATOR	FLEX3000	PYRO PRO	ACRYLIC	UNIVERSAL	KL101	KGL120	KM100	EASY SET	FLEX2000
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	4.35%	-1.32%	-1.47%	-3.23%	-5.42%	-7.27%	7.48%	2.48%	0.65%
Use of renewable primary energy resources used as raw materials	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	4.35%	-1.32%	-1.47%	-3.23%	-5.42%	-7.27%	7.48%	2.48%	0.65%
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	152.31%	-18.32%	-40.55%	-40.75%	-41.03%	-24.80%	-11.00%	-11.60%	26.16%
Use of non-renewable primary energy resources used as raw materials	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	152.37%	-18.31%	-40.52%	-40.72%	-40.99%	-24.78%	-10.99%	-11.59%	26.14%
Use of secondary materials	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Use of renewable secondary fuels	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Use of non-renewable secondary fuels	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Use of net fresh water	182.09%	-11.86%	-48.38%	-48.41%	-49.35%	-23.18%	-12.89%	-13.99%	-31.22%

ADDITIONAL ENVIRONMENTAL INFORMATION



% VARIATIONS OF INCLUDED PRODUCTS

USE OF RESOURCES

% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE				
INDICATOR	RIVA ACRYLIC	RIVA SUPER	RIVA SUPER FLEX	SUPER100
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	-1.47%	-0.32%	-1.45%	2.77%
Use of renewable primary energy resources used as raw materials	0.00%	0.00%	0.00%	0.00%
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	-1.47%	-0.32%	-1.45%	2.77%
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	-40.55%	-11.01%	17.28%	17.78%
Use of non-renewable primary energy resources used as raw materials	0.00%	0.00%	0.00%	0.00%
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	-40.52%	-11.00%	17.26%	17.77%
Use of secondary materials	0.00%	0.00%	0.00%	0.00%
Use of renewable secondary fuels	0.00%	0.00%	0.00%	0.00%
Use of non-renewable secondary fuels	0.00%	0.00%	0.00%	0.00%
Use of net fresh water	-48.38%	-13.31%	-20.57%	21.60%

ADDITIONAL ENVIRONMENTAL INFORMATION



% VARIATIONS OF INCLUDED PRODUCTS WASTE CATEGORIES

% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE									
INDICATOR	FLEX3000	PYRO PRO	ACRYLIC	UNIVERSAL	KL101	KGL120	KM100	EASY SET	FLEX2000
Hazardous waste disposed	3.38%	0.74%	0.28%	0.27%	0,21%	-0,05%	0,15%	-0,02%	-0,37%
Non-hazardous waste disposed	9.11%	1.48%	0.52%	0.49%	0,36%	-0,18%	0,31%	-0,09%	-0,82%
Radioactive waste disposed	7.39%	3.79%	1.84%	1.83%	1,79%	0,50%	0,24%	0,12%	-1,64%
% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE									
INDICATOR	RIVA ACRYLIC			RIVA SUPER		RIVA SUPER FLEX		SUPER100	
Hazardous waste disposed	0.28%			0.01%		-0.25%		-0.18%	
Non-hazardous waste disposed	0.52%			-0.01%		-0.56%		-0.39%	
Radioactive waste disposed	1.84%			0.14%		-1.19%		-1.13%	

Regarding Output flows and considering that a mass balance approach was followed for waste produced from production processes, as well as the fact that all waste is considered to be landfilled, the variation for all output flows indicators for all of the examined products is set to 0%.

ADDITIONAL ENVIRONMENTAL INFORMATION



% VARIATIONS OF INCLUDED PRODUCTS

ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE									
INDICATOR	FLEX3000	PYRO PRO	ACRYLIC	UNIVERSAL	KL101	KGL120	KM100	EASY SET	FLEX2000
Particulate Matter emissions	23.30%	4.11%	-6.46%	-6.59%	-6.75%	5.41%	-1.13%	-1.49%	4.08%
Ionizing radiation human	1.72%	-32.65%	-1.85%	-1.92%	-2.01%	-26.21%	-0.38%	-0.38%	-0.26%
Eco-toxicity, freshwater	143.40%	31.57%	-37.81%	-38.48%	-39.39%	41.37%	-8.18%	-10.32%	24.54%
Human toxicity, cancer	10.42%	-32.30%	-3.87%	-4.20%	-4.62%	-24.18%	0.04%	-0.72%	1.11%
Human toxicity, non-cancer effects	10.82%	10.97%	-4.51%	-4.55%	-4.61%	4.38%	0.30%	0.18%	2.29%
Land use related impacts / Soil quality	-2.33%	2.05%	0.03%	-3.04%	-6.85%	12.88%	13.73%	4.99%	-0.47%

ADDITIONAL ENVIRONMENTAL INFORMATION

% VARIATIONS OF INCLUDED PRODUCTS

ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS



% VARIATIONS FROM THE AVERAGE CEMENT-BASED ADHESIVE				
INDICATOR	RIVA ACRYLIC	RIVA SUPER	RIVA SUPER FLEX	SUPER100
Particulate Matter emissions	-6.46%	-1.57%	2.61%	2.93%
Ionizing radiation human	-1.85%	1.42%	1.39%	1.56%
Eco - toxicity, freshwater	-37.81%	-10.69%	15.50%	17.19%
Human toxicity, cancer	-3.87%	0.63%	1.93%	2.73%
Human toxicity, non-cancer effects	-4.51%	0.15%	1.74%	1.84%
Land use related impacts / Soil quality	0.03%	0.05%	-3.63%	3.73%

DIFFERENCES VERSUS PREVIOUS VERSIONS

2024-02-20 (Version 1.1)

Editorial Change: Addition of the Eco-platform logo

REFERENCES

- International EPD® System, PCR 2019:14 Construction Products, version 1.3.1
- EN 15804:2012+A2:2019/AC 2021 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
- International EPD® System, General Program Instructions for the International EPD System, version 4.01
- ISO 14020:2000 - Environmental Labels and Declarations - General Principles
- ISO 14025:2006 - Environmental labels and declarations - Type III environmental declarations - Principles and procedures
- ISO 14040:2006 - Environmental management - Life Cycle assessment - Principles and framework
- ISO 14044:2006 - Environmental management - Life Cycle assessment - Requirements and guidelines
- The International EPD® System - The International EPD System is a programme for type III environmental declarations, maintaining a system to verify and register EPDs as well as keeping a library of EPDs and PCRs in accordance with ISO 14025.
www.environdec.com
- Sphera - GaBi Product Sustainability software - www.sphera.com
- Ecoinvent/ Ecoinvent Centre - www.Eco-invent.org
- Mavridou, Sofia. (2018). Construction and Demolition (C&D) Waste: Potential uses and current situation in Greece and Cyprus.