

Unique identification code of the product - type: MARMOLINE CONNECT

Acrylic based sealant

It refers to all batches of MAMROLINE CONNECT, produced after the issue of the present declaration

Intended use /es:

sealing material EN 15651-1: F-EXT-INT (class 12.5 P)

Manufacturer:

NORDIA S.A., Head Office: 364 Kifissias av., 15233 Chalandri /Greece, tel: +302295022225

Manufacturing plant: 1st km Malakasas – Markopoulou Road, 19011 Malakasa, Attica, Greece

System of AVCP: 3

Harmonized standard: EN 15651-1:2012

Notified body/ies:

Declared performance /s:

Conditioning: Procedure A (ISO 8339)

<i>Essential characteristics</i>	<i>Declared performance</i>	<i>Standard</i>
Reaction to fire	Class E	EN 15651-1
Release of chemicals	None (see product's SDS)	
Water Tightness & air tightness as determined by:		
Resistance to flow	≤ 3mm	
Loss of volume	≤ 45%	
Determination of tensile properties after immersion in water (23°C)	≥ 25%	
Durability	Pass	

Appropriate technical documentation:


Tecnalía Research & Innovation (1292), report No 089110-a, 14_08336-1-a, 14_08336-2-a

DoP ELASTOT. – ACRYL. 30/6/2020

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) 305/2011, under the sole responsibility of the manufacturer identified above. Signed for and on behalf of the manufacturer by:

Malakasa, 5/9/2024

NORDIA S.A.
QUARRYING AND INDUSTRIAL
AND COMMERCIAL CO.S.A.
VAT: EL 999211319
364 KIFISSIAS AVENUE
CHALANDRI, 15233 ATHENS, GR
TEL. 0030 - 210 - 68 96 480
FAX: 0030 - 210 - 68 63 440

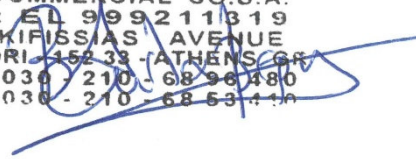

Vivi Dilaveri
Director of Marmoline Business Unit, Nordia S.A.